

LAMINATE FLOORING 2023 - 2024





ALSA FLOOR

IN-REGISTERED

RESISTANT

SUSTAINABLE

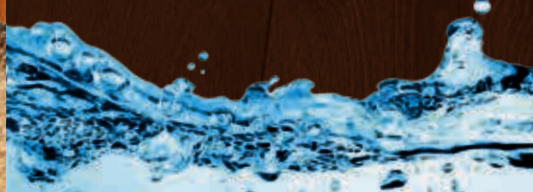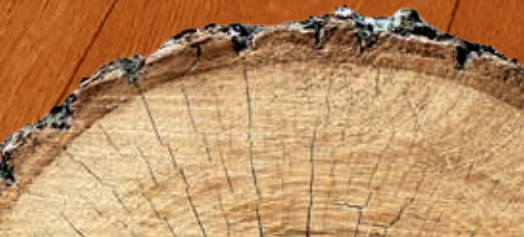

ALSAFLOOR

FRENCH QUALITY LAMINATE FLOORING.



Marlenheim

Our vision for tomorrow's planet !

OUR DREAM PROJECT

Key points are Waste, Resources, Energy, Alsa flooring and Emissions.

This environmentally-focused strategy is applied across the whole company to prevent any negative effects on our planet.

All of us, employees, customers, partners and suppliers alike, are involved in this sincere and realistic project.



Learn more about our project in video



Why choose ALSAFLOOR ?



CHOOSE A FRENCH MANUFACTURER !

Our plant is located in Alsace and we are the only laminate manufacturer in the country.



A SHORT CIRCUIT VALUED

We source our materials via short supply chains in France and the EU.



A MANUFACTURER PROUD OF ITS EFFORTS FOR THE ENVIRONMENT


Our factory is fitted with photovoltaic panels and a biomass boiler. We burn our wood waste (sawdust) to produce hot water and heat our plant.

CONTENTS

Page 4	ALSAFLOOR RANGES
Page 5	
Page 6	
	SURFACE STRUCTURES
	WATER RESISTANT
Pages 7 to 13	12 mm
Pages 8 & 9	HERRINGBONE 12 MM
Pages 10 & 11	SOLID PLUS
Pages 12 & 13	SOLID MEDIUM
Pages 14 to 25	8 mm
Pages 16 & 17	ELEGANT HERRINGBONE
Pages 18 & 19	ELEGANT
Pages 20 & 21	ELEGANT MEDIUM
Pages 22 & 23	OSMOZE
Pages 24 & 25	CLIP400
Pages 26 to 30	DESIGNS
Page 31	PRODUCT RANGES
Pages 32 & 33	TECHNICAL FEATURES
Pages 34 & 35	ACCESSORIES

ALSAFLOOR

A 100% WATER RESISTANT AND IN-REGISTERED RANGE

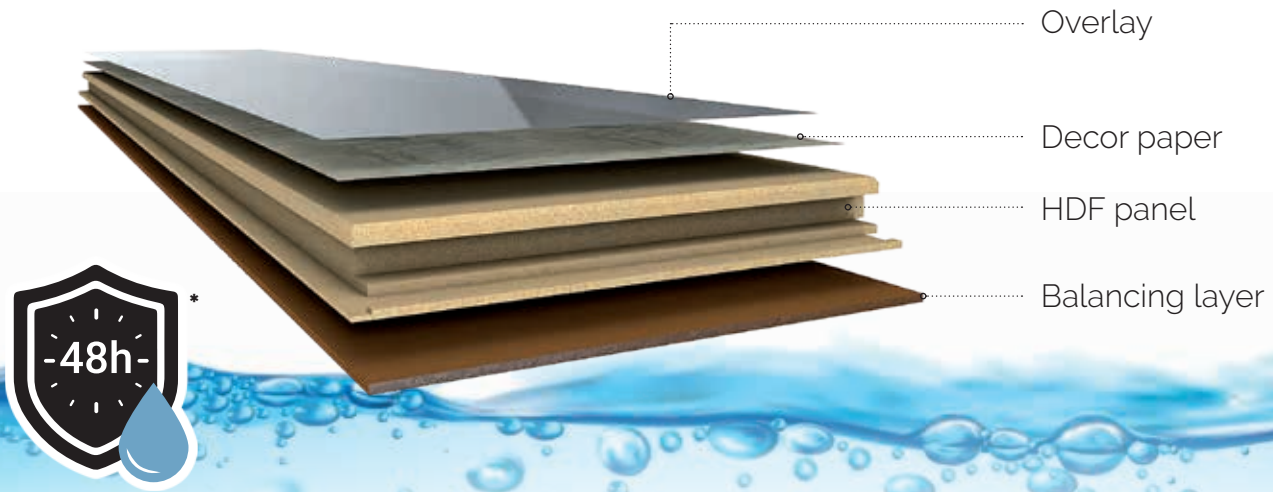

LAMINATE RANGES

12 mm RANGE

HERRINGBONE	AC6	12 mm	35 YEARS GUARANTEE	23	33	X LOCK	4 V-grooves
SOLID PLUS	AC6	12 mm	35 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G	4 V-grooves
SOLID MEDIUM	AC6	12 mm	35 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G	4 V-grooves

8 mm RANGE

ELEGANT HERRINGBONE	AC5	8 mm	25 YEARS GUARANTEE	23	33	X LOCK	4 V-grooves
ELEGANT	AC5	8 mm	25 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G	4 V-grooves
ELEGANT MEDIUM	AC5	8 mm	25 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G	4 V-grooves
OSMOZE	AC5	8 mm	25 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G	4 V-grooves
CLIP 400	AC5	8 mm	25 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G	

SURFACE STRUCTURES



In-Registered texture


A raised surface **along the wood veins** offers a strikingly realistic sense of authenticity!




In-Registered texture heliochrome

A mat / glossy effect (**mat on the surface and glossy in the wood grain**) for a deeper and more apparent structure.

CLIP SYSTEMS



A clip system that locks the planks together.



Designed and patented by Alsaflooring. Does away with the need for a left and right plank.

CLASSES OF USE

100% INTENSIVE USE



Abrasion resistance
AC5 AC6



Heavy domestic and heavy commercial use.

STANDARDS



Greenguard and Greenguard gold certified.



Top quality hdf panel



*Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).




Our products are made from wood taken from sustainably managed forests and PEFC™ certified.



The EC symbol on all our products certifies that they are produced in compliance with currently applicable standards and that they can move freely between countries within the European Community.



A water-resistant laminate flooring

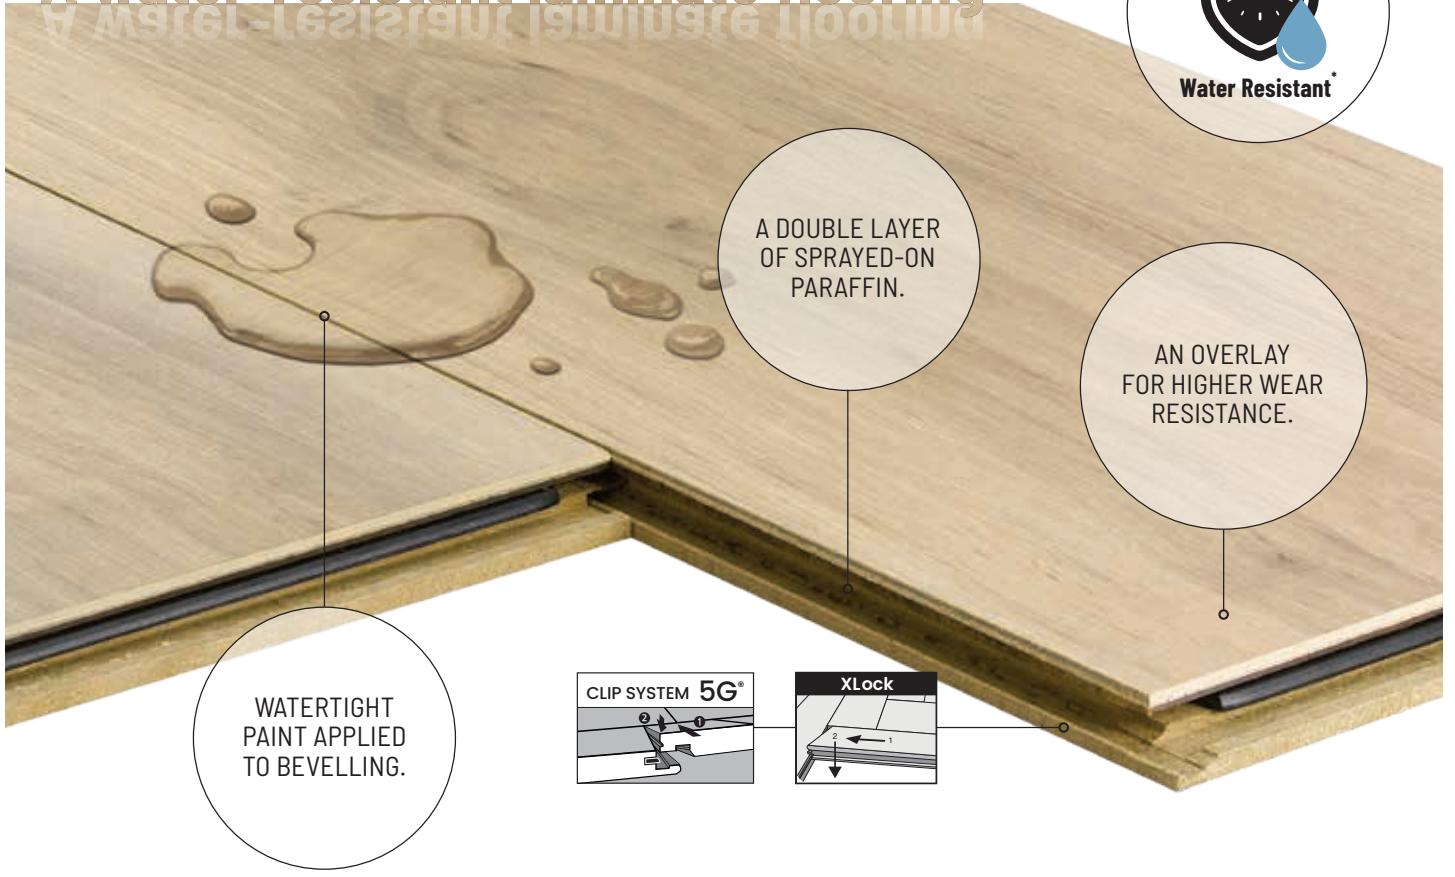

A DOUBLE LAYER OF SPRAYED-ON PARAFFIN.

AN OVERLAY FOR HIGHER WEAR RESISTANCE.

WATERTIGHT PAINT APPLIED TO BEVELLING.



WATERTIGHT PRODUCTS


We use innovative technology based on the application of waterproof paint on the beveling and a specific-purpose impermeable paraffin to make our assembly system watertight. Our WR products comply with NALFA level I requirements.

HARDWEARING PRODUCTS

Our WR products are rated AC5 and AC6 for wear resistance, allowing them to be fitted in any household room and in business premises (moderate to intensive use - class 23/33). Our 5G and XLOCK assembly systems are the guarantee of a robust, stable installation.

ENVIRONMENTALLY FRIENDLY

The whole of our range is PEFC™ certified, offering verified assurance that all the wood used in it originates from sustainably managed forests. Our WR range is rated A+, for indoor air quality.

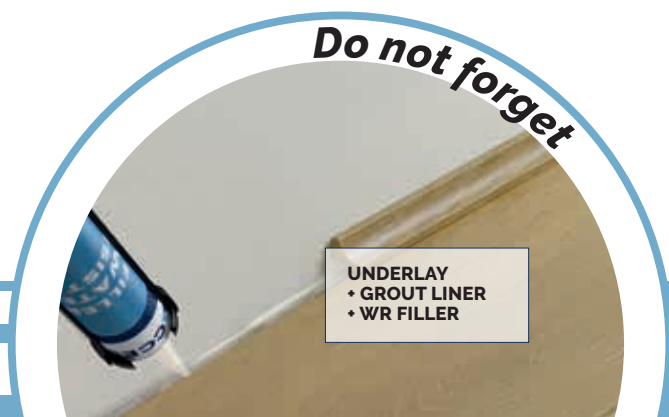

UNDERLAY
+ GROUT LINER
+ WR FILLER

*No change in appearance and swelling ≤ 0.2 mm. Test performed according to NALFA guidelines and the ISO 4760 standard.

ALSAFLOOR
RANGE

12 mm



Water
resistant*

708 ULYSSES

HERRINGBONE
SOLID PLUS
SOLID MEDIUM




HERRINGBONE 12 MM

An authentic, traditional design with an embossed finish produces a result stunningly similar to genuine parquet.


AC6	12 mm	35 YEARS GUARANTEE	23	33	X LOCK	4 V-grooves
-----	-------	--------------------	----	----	--------	-------------




535 PRALINE OAK

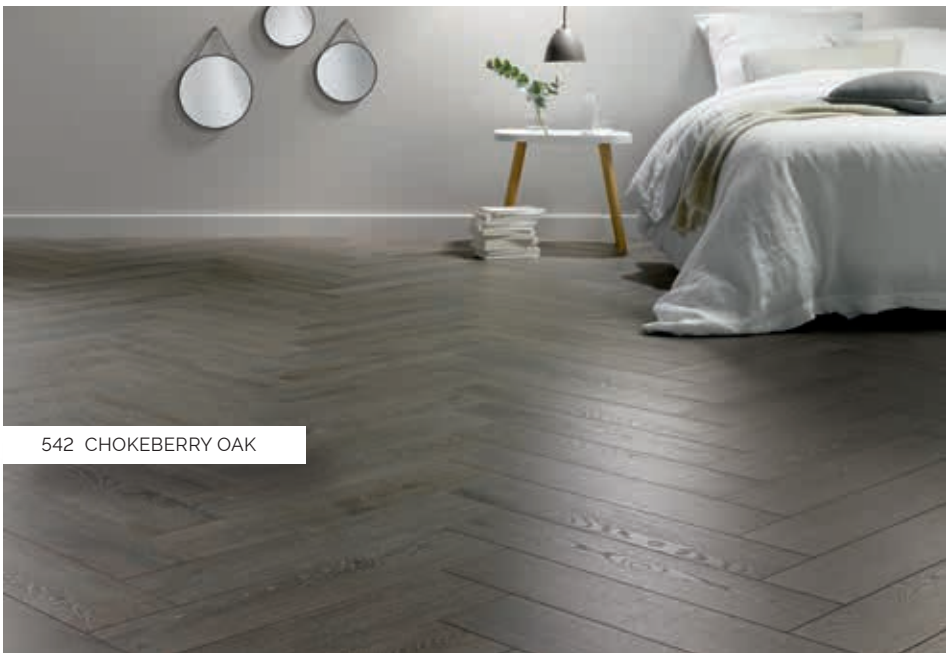

542 CHOKEBERRY OAK

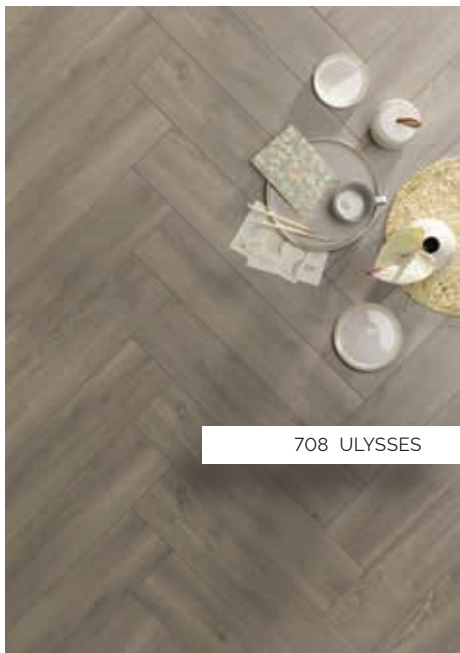

708 ULYSSES




SIMPLIFY
THE INSTALLATION,
ORDER YOUR STARTING
TRIANGLE KIT




2 triangles/box available
in every finish


WATCH NOW
ON YOUTUBE, THE
INSTALLATION OF THE
HERRINGBONE XLOCK !

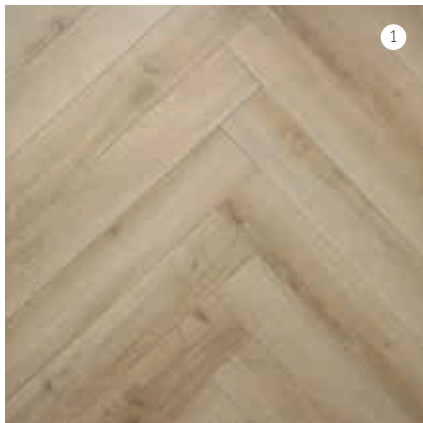


435 Jefferson

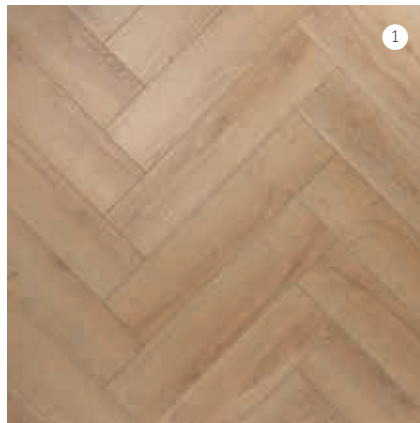


471 Sunset

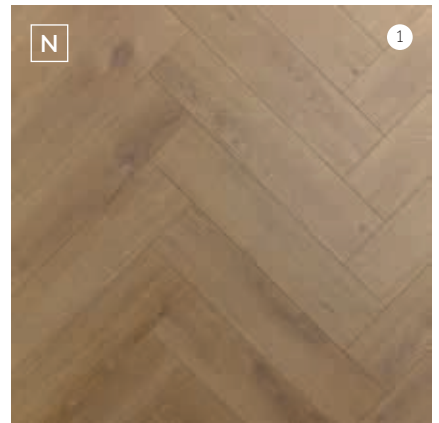


529 Almond oak

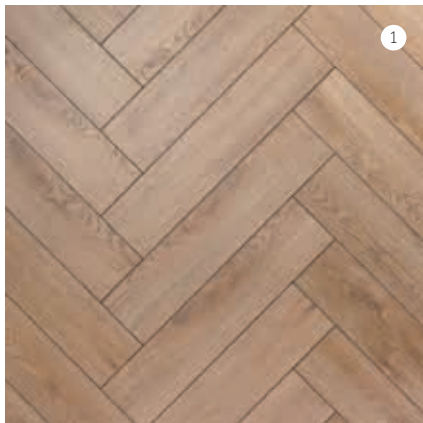


535 Praline oak

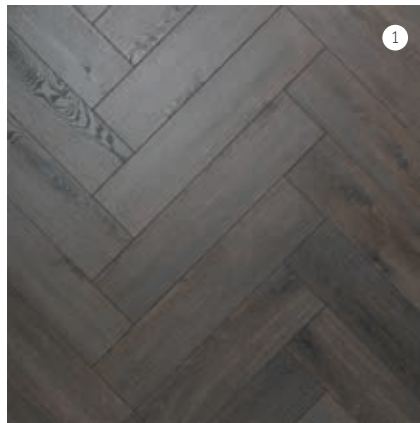


542 Chokeberry oak

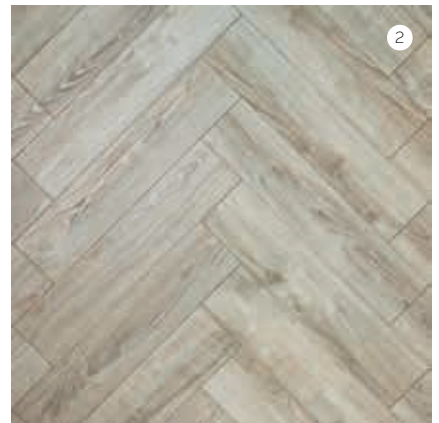


619 Sardinia oak

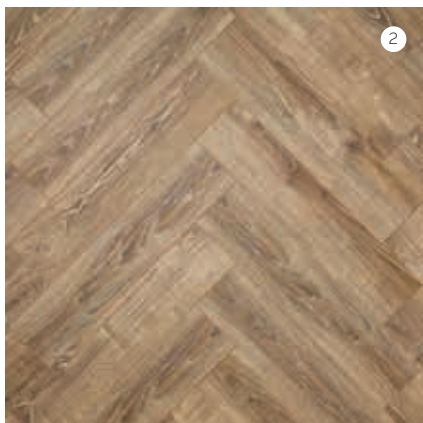

622 Balearic oak

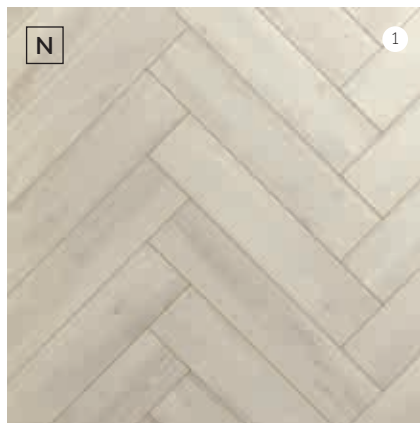

701 Plato

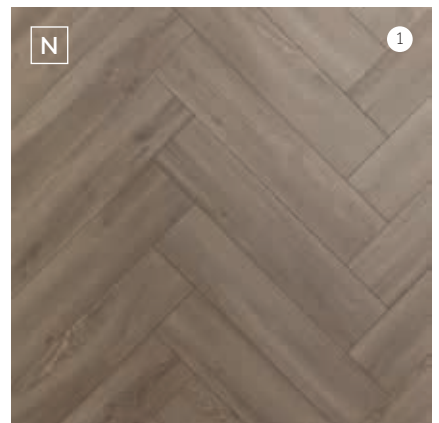


708 Ulysses

Technical features	Length: 644 mm - 25.35"	Width: 143 mm - 5.63"	Panel: hdf	Planks/box: 13	Area/box: 1.20 m ² - 12.91 sqf	Gross weight/box: 13.10 kg - 28.88 lb
--------------------	----------------------------	--------------------------	---------------	-------------------	--	--



SOLID PLUS


An extra-large width offers a laminate with a sense of depth, space and style.




559 CARMINE OAK



707 GORGIAS

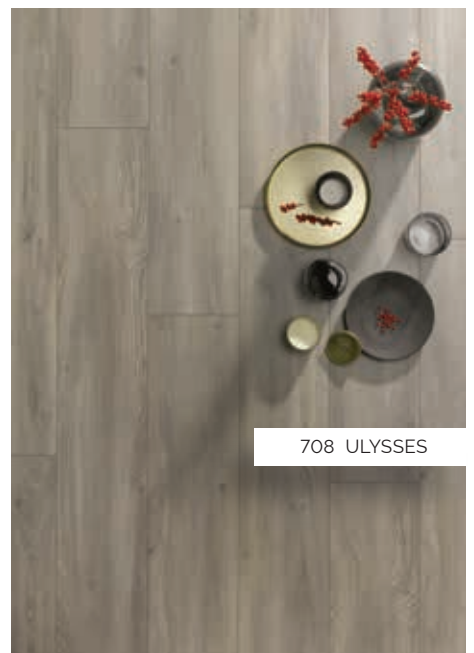

708 ULYSSES



435 Jefferson




471 Sunset



514 Namur



518 Rafia

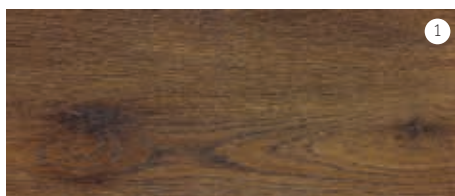

528 Chestnut oak




529 Almond oak



535 Praline oak



536 Linen oak

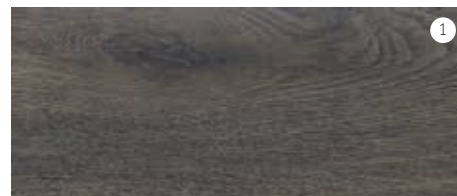

542 Chokeberry oak



559 Carmine oak



619 Sardinia oak



621 Canaries oak



622 Balearic oak



627 Polar oak




701 Plato



702 Aristotle



707 Gorgias

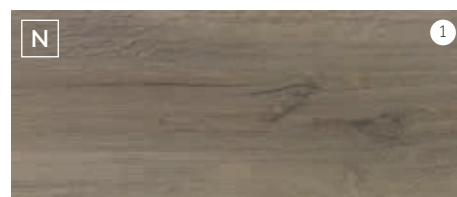

708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 214 mm - 8.43"	Panel: hdf	Planks/box: 6	Area/box: 1.65 m ² - 17.76 sqf	Gross weight/box: 18.10 kg - 39.90 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	--



SOLID MEDIUM

All the features of the Solid range, specially designed for smaller areas.


AC6	12 mm	35 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G ⁺	4 V-grooves
-----	-------	--------------------	----	----	-----------------------------	-------------



701 PLATO



435 Jefferson

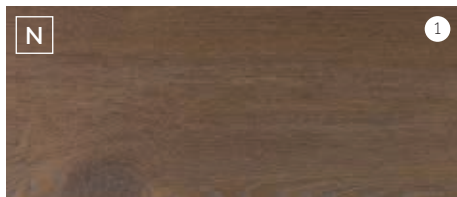

559 Carmine oak



619 Sardinia oak



621 Canaries oak



622 Balearic oak



701 Plato



702 Aristotle



707 Gorgias



708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 122 mm - 4.80"	Panel: hdf	Planks/box: 6	Area/box: 0.94 m ² - 10.12 sqf	Gross weight/box: 10.50 kg - 23.15 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	--

ALSAFLOOR
RANGE

8 mm



Water
resistant*

/'hu:ge:/ [hue-guh]
nygge

Den High grade well-being, coziness
ambiance.

707 GORGIAS

ELEGANT HERRINGBONE

ELEGANT

ELEGANT MEDIUM

OSMOZE

CLIP 400

ELEGANT CONCEPT

*The Elegant style features streamlined,
timeless designs, producing appealing,
sophisticated interiors.*

*The ideal solution for emphasising
the intimacy of your surroundings.*




ELEGANT HERRINGBONE

A warm, classic pattern that brings out the unique warmth of the Elegant concept designs.



525 CALISSON OAK


SIMPLIFY THE INSTALLATION, ORDER YOUR STARTING TRIANGLE KIT



Patented triangles

2 triangles/box available in every finish

WATCH NOW ON YOUTUBE, THE INSTALLATION OF THE HERRINGBONE XLOCK !





706 MOLLY




In-Registered texture



511 KRAFT OAK

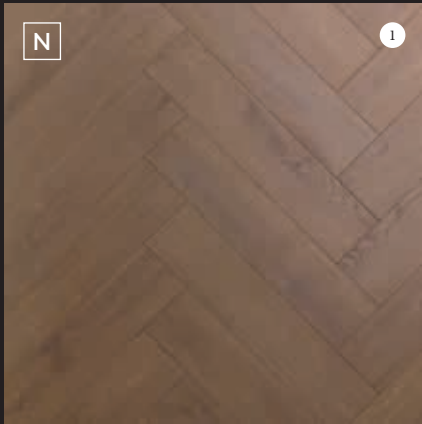


508 Bolero oak

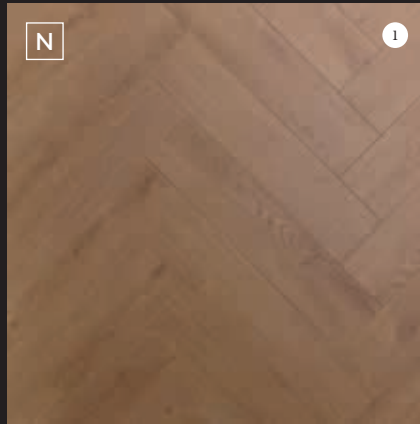


511 Kraft oak




521 Aida oak

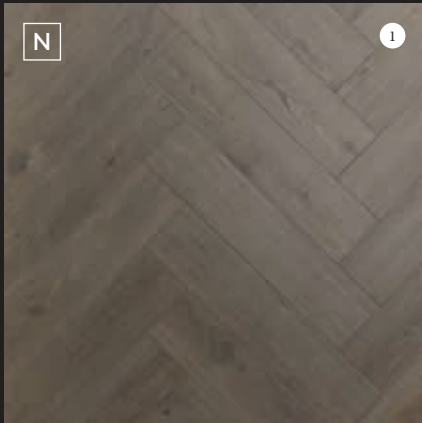


524 Poppy oak

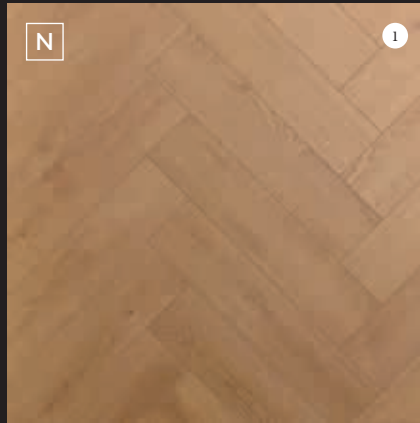


525 Calisson oak

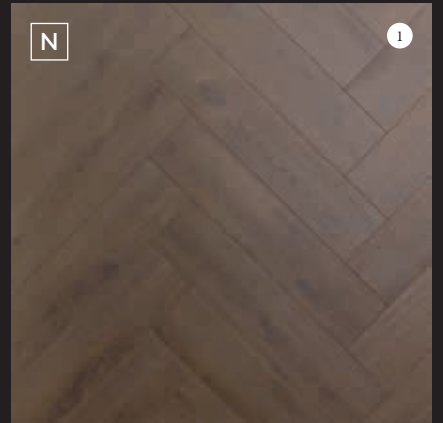


560 Stromboli

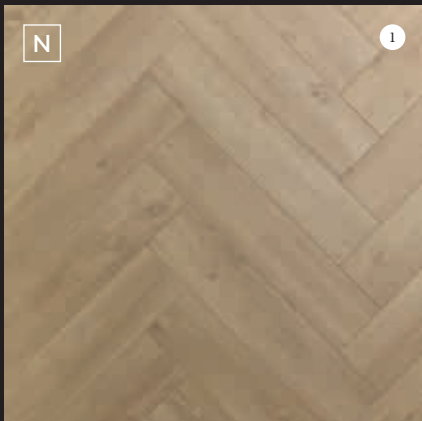

706 Molly

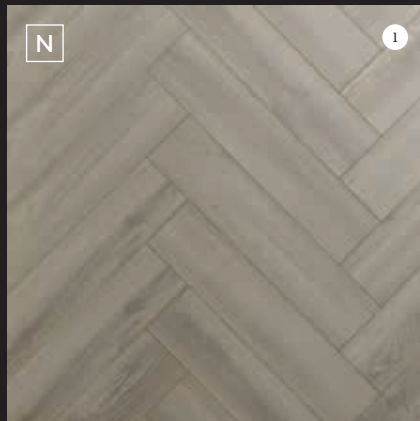

707 Gorgias

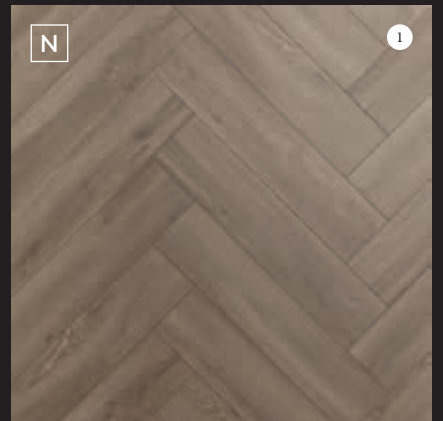

708 Ulysses

Technical features

Length:
644 mm - 25.35"

Width:
143 mm - 5.63"

Panel:
hdf

Planks/box:
20

Area/box:
184 m² - 19.81 sqf

Gross weight/box:
13.15 kg - 29 lb




ELEGANT

A comfortably sophisticated, warm look.

AC5	8 mm	25 YEARS GUARANTEE	23	33	CLIP SYSTEM 5G ⁺	4 V-grooves
-----	------	--------------------	----	----	-----------------------------	-------------



511 KRAFT OAK

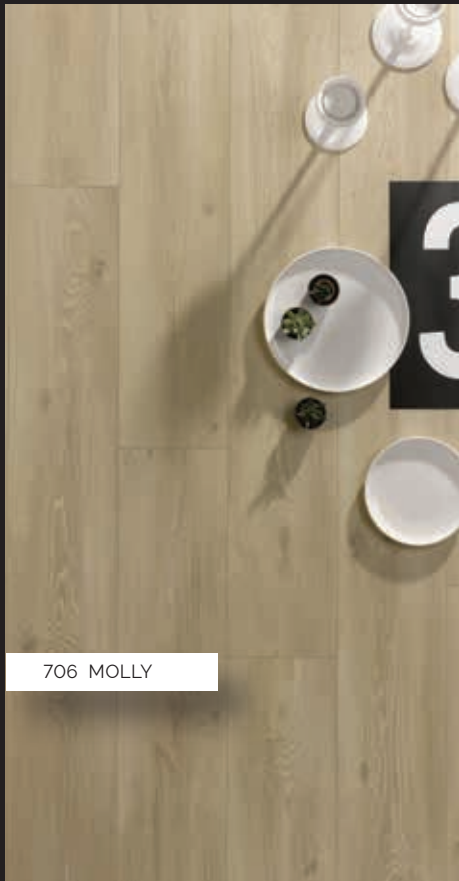

706 MOLLY



525 CALISSON OAK



In-Registered texture



524 POPPY OAK



508 Bolero oak



511 Kraft oak



521 Aida oak



524 Poppy oak




525 Calisson oak



560 Stromboli



706 Molly

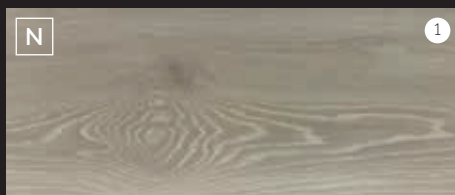

707 Gorgias



708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 192 mm - 7.56"	Panel: hdf	Planks/box: 9	Area/box: 2.22 m ² - 23.90 sqf	Gross weight/box: 16 kg - 35.27 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	---------------------------------------



ELEGANT MEDIUM

122 mm planks offer unparalleled elegance.

AC5	 8 mm	25 YEARS GUARANTEE	 23	 33	CLIP SYSTEM 5G ⁺	 4 V-grooves
-----	---	--------------------------	---	---	-----------------------------	--



508 BOLERO OAK



521 AIDA OAK



In-Registered texture



508 Bolero oak



511 Kraft oak



521 Aïda oak



524 Poppy oak




525 Calisson oak



560 Stromboli



706 Molly

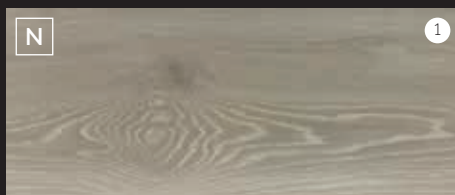

707 Gorgias




708 Ulysses

Technical features	Length: 1286 mm - 50.62"	Width: 122 mm - 4.80"	Panel: hdf	Planks/box: 9	Area/box: 1.41 m ² - 15.18 sqf	Gross weight/box: 10.30 kg - 22.71 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	--



OSMOZE


A wide range of strikingly realistic designs for all preferences.



535 PRALINE OAK



529 ALMOND OAK

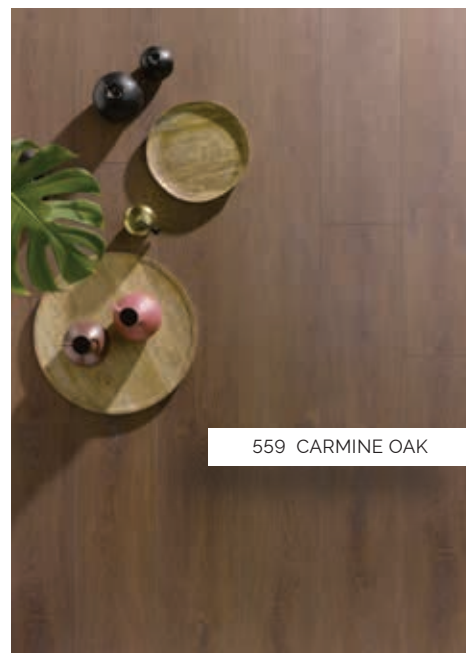

559 CARMINE OAK



541 COCO OAK




In-Registered texture



420 Taza oak



436 Alpaca oak

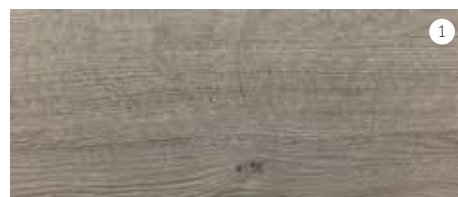

437 Grey building



448 Grey oak



449 Nevada oak




450 Nature oak



514 Namur



518 Rafia

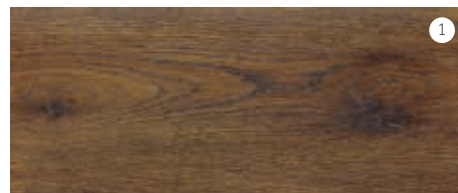

528 Chestnut oak



529 Almond oak




535 Praline oak



536 Linen oak



541 Coco oak

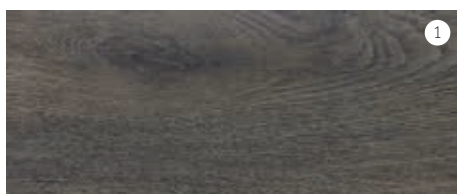

542 Chokeberry oak



559 Carmine oak



701 Plato



702 Aristotle




705 Papyrus

Technical features	Length: 1286 mm - 50.62"	Width: 192 mm - 7.56"	Panel: hdf	Planks/box: 9	Area/box: 2.22 m ² - 23.90 sqf	Gross weight/box: 16 kg - 35.27 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	---------------------------------------



CLIP 400


A wide choice of neat designs, without bevels, for all decorative ideas.



518 RAFIA



528 CHESTNUT OAK



536 LINEN OAK



420 Taza oak



436 Alpaca oak



437 Grey building



448 Grey oak



449 Nevada oak



450 Nature oak



514 Namur



518 Rafia



528 Chestnut oak



529 Almond oak




535 Praline oak




536 Linen oak



541 Coco oak

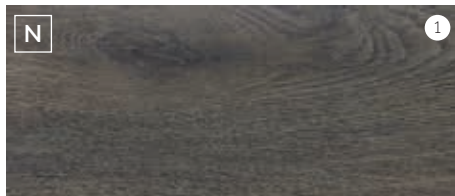

542 Chokeberry oak

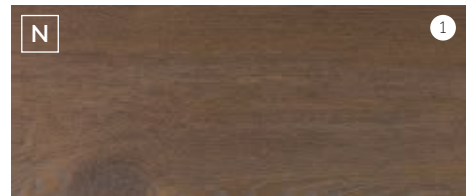

559 Carmine oak



701 Plato



702 Aristotle



705 Papyrus

Technical features	Length: 1286 mm - 50.62"	Width: 192 mm - 7.56"	Panel: hdf	Planks/box: 9	Area/box: 2.22 m ² - 23.90 sqf	Gross weight/box: 16.10 kg - 35.49 lb
--------------------	-----------------------------	--------------------------	---------------	------------------	--	--

DESIGNS



420 Taza oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



435 Jefferson
Available in the ranges
Herringbone / Solid plus /
Solid Medium



In-Registered
texture



437 Grey building
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



436 ALPACA OAK



436 Alpaca oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



448 Grey oak
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



449 Nevada oak
Available in the ranges
Osmoze / Clip 400




450 Nature oak
Available in the ranges
Osmoze / Clip 400



471 Sunset
Available in the ranges
Herringbone / Solid plus



508 Bolero oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium

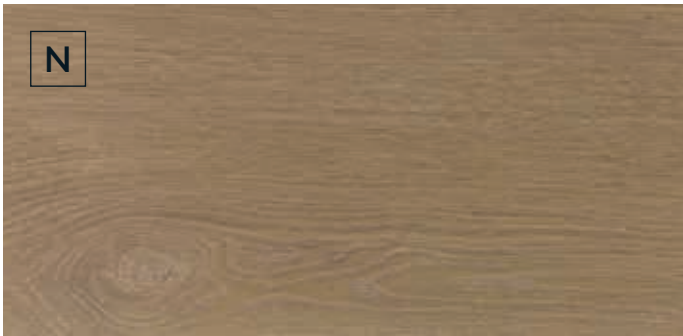

511 Kraft oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



514 Namur
Available in the ranges
Solid plus / Osmoze / Clip 400



518 Rafia
Available in the ranges
Solid plus / Osmoze / Clip 400



521 Aida oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium





524 Poppy oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture

525 Calisson oak
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture

528 Chestnut oak
Available in the ranges
Solid plus / Osmoze / Clip 400



In-Registered
texture

529 Almond oak
Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400



In-Registered
texture



535 Praline oak
Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400




In-Registered
texture



536 Linen oak
Available in the ranges
Solid plus / Osmoze / Clip 400



In-Registered
texture

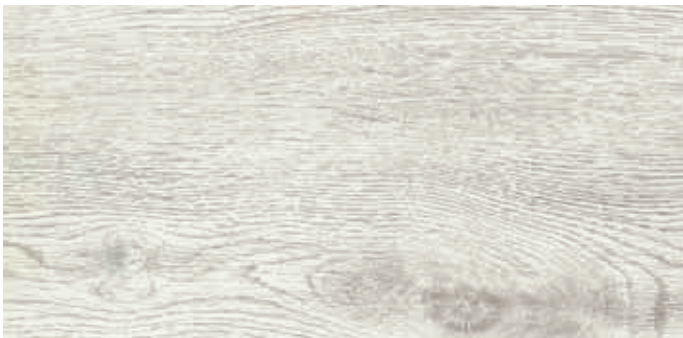

541 Coco oak
Available in the ranges
Osmoze / Clip 400




In-Registered
texture



542 Chokeberry oak
Available in the ranges
Herringbone / Solid plus /
Osmoze / Clip 400



In-Registered
texture

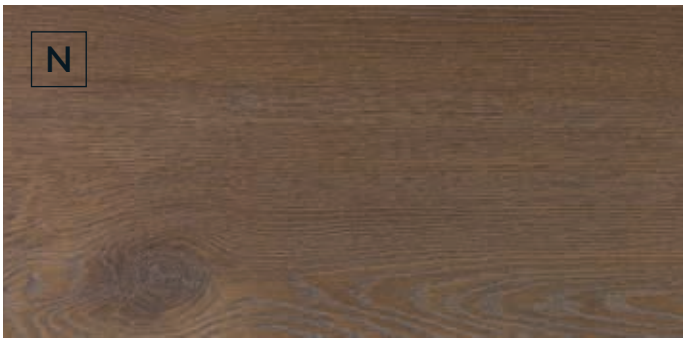

559 Carmine oak
Available in the ranges
Solid plus / Solid medium
Osmoze / Clip 400



In-Registered
texture



560 Stromboli
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



619 Sardinia oak
Available in the ranges
Herringbone / Solid plus /
Solid medium



In-Registered
heliochrome



621 Canaries oak
Available in the ranges
Solid plus / Solid medium



In-Registered
heliochrome



622 Balearic oak
Available in the ranges
Herringbone / Solid plus /
Solid medium



In-Registered
heliochrome



627 Polar oak
Available in the range
Solid plus



In-Registered
heliochrome



701 Plato
Available in the ranges
Herringbone / Solid plus /
Solid medium / Osmoze / Clip 400



In-Registered
texture



702 Aristotle
Available in the ranges
Solid plus / Solid medium /
Osmoze / Clip 400



In-Registered
texture



705 Papyrus
Available in the ranges
Osmoze / Clip 400



In-Registered
texture



706 Molly
Available in the ranges
Elegant Herringbone / Elegant /
Elegant medium



In-Registered
texture



707 Gorgias
Available in the ranges: Solid plus /
Solid medium / Elegant Herringbone /
Elegant / Elegant medium



In-Registered
texture



708 Ulysses
Available in the ranges:
Herringbone / Solid plus / Solid medium /
Elegant Herringbone / Elegant /
Elegant medium




In-Registered
texture

2023 DESIGNS

		12 mm			8 mm				
		HERRINGBONE	SOLID PLUS	SOLID MEDIUM	ELEGANT HERRINGBONE	ELEGANT	ELEGANT MEDIUM	OSMOZE	CLIP 400
		P8-9	P10-11	P12-13	P16-17	P18-19	P20-21	P22-23	P24-25
420	Taza oak							●	<input type="checkbox"/>
435	Jefferson	●	●	●					
436	Alpaca oak							●	<input type="checkbox"/>
437	Grey building							●	<input type="checkbox"/>
448	Grey oak							●	●
449	Nevada oak							●	●
450	Nature oak							●	●
471	Sunset	●	●						
508	Bolero oak				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
511	Kraft oak				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
514	Namur		●					●	<input type="checkbox"/>
518	Rafia		●					●	●
521	Aida oak				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
524	Poppy oak				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
525	Calisson oak				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
528	Chestnut oak		●					●	<input type="checkbox"/>
529	Almond oak	<input type="checkbox"/>	●					●	<input type="checkbox"/>
535	Praline oak	●	●					●	<input type="checkbox"/>
536	Linen oak		●					●	<input type="checkbox"/>
541	Coco oak							●	<input type="checkbox"/>
542	Chokeberry oak	●	●					●	<input type="checkbox"/>
559	Carmine oak		<input type="checkbox"/>	<input type="checkbox"/>				<input type="checkbox"/>	<input type="checkbox"/>
560	Stromboli				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
619	Sardinia oak	●	●	●					
621	Canaries oak		●	●					
622	Balearic oak	●	●	●					
627	Polar oak		●						
701	Plato	<input type="checkbox"/>	●	●				●	●
702	Aristotle		●	●				●	●
705	Papyrus							●	●
706	Molly				<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
707	Gorgias		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
708	Ulysses	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

TECHNICAL FEATURES

		HERRINGBONE	SOLID PLUS	SOLID MEDIUM
PRODUCT FEATURES	Warranty	← 35 years →		
	Clic system	X Lock	5G®	5G®
	Bevels	4 bevels	4 bevels	4 bevels
	Wet room compatibility	←		
	Underfloor heating compatibility	←		
TESTS AND TECHNICAL FEATURES	PEFC™ - Greenguard and Greenguard Gold	←		
	Class of use • ISO 10874	←		
	Abrasion resistance • EN 13329	← AC6 →		
	Impact resistance • EN 13329	←		
	CE and UKCA labelling • EN 14041	←		
	Health safety labelling	←		
	DOP number • EN 14041	002-20/RPC/2022	002-4/RPC/2013	002-5/RPC/2013
	Slippery • EN 13893	←		
	Reaction to fire • EN 13501-1	←		
	Formaldehyde emission • EN 717-1	←		
	Thermal resistance • EN 12667	← 0.0967 (m² K)/W →		
	Thermal conductivity • EN 12667	← 0.121 W/(m x K) →		
DIMENSIONS AND LOGISTICS	Thickness • mm	← 12 mm →		
	Length x Width • mm - inches	644 x 143 mm 25.35" x 5.63"	1286 x 214 mm 50.62" x 8.43"	1286 x 122 mm 50.62" x 4.80"
	Planks/box	13	6	6
	Area/box • m² - sqf	1.20 m² - 12.91 sqf	1.65 m² - 17.76 sqf	0.94 m² - / 10.12 sqf
	Gross weight/box • kg - lb	13.10 kg - 28.88 lb	18.10 kg - 39.90 lb	10.50 kg - 23.15 lb
	Box/pallet	60	48	78
	Area/pallet • m² - sqf	71.80 m² - 772.85 sqf	79.30 m² - 853.58 sqf	73.40 m² - 790.07 sqf
	Gross weight/pallet • kg - lb	786 kg - 1732.83 lb	869 kg - 1915.82 lb	819 kg - 1805.59 lb



ELEGANT HERRINGBONE	ELEGANT	ELEGANT MEDIUM	OSMOZE	CLIP 400
		25 years		
X Lock	5G®	5G®	5G®	5G®
4 bevels	4 bevels	4 bevels	4 bevels	No
	Water Resistant ⁽¹⁾			
	Temperature storage underfloor heating, and PRE electric underfloor heating. ⁽²⁾			
	Yes			
	23/33			
		AC5		
	IC3			
	Yes ⁽³⁾			
	A+ ^(*)			
002-17/RPC/2022	002-19/RPC/2022	002-18/RPC/2022	002-8/RPC/2013	002-7/RPC/2013
	DS			
	Cfl-S1			
	E1 ≤ 3.5 mg/m ² .h			
		0.0661 (m ² K)/W		
		0.122 W/(m x K)		
		8 mm		
644 x 143 mm 25.35" x 5.63"	1286 x 192 mm 50.62" x 7.56"	1286 x 122 mm 50.62" x 4.80"	1286 x 192 mm 50.62" x 7.56"	1286 x 192 mm 50.62" x 7.56"
20	9	9	9	9
1.84 m ² - 19.81 sqf	2.22 m ² - 23.90 sqf	1.41 m ² - 15.18 sqf	2.22 m ² - 23.90 sqf	2.22 m ² - 23.90 sqf
13.15 kg - 29 lb	16.00 kg - 35.27 lb	10.30 kg - 22.71 lb	16.00 kg - 35.27 lb	16.10 kg - 35.49 lb
60	48	78	48	48
110.50 m ² - 1189.41 sqf	106.70 m ² - / 1148.51 sqf	110.10 m ² - 1185.11 sqf	106.70 m ² - 1148.51 sqf	106.70 m ² - 1148.51 sqf
789 kg - 1739.45 lb	768 kg - 1693.15 lb	803 kg - 1770.31 lb	768 kg - 1693.15 lb	768 kg - 1693.15 lb

This information is given for information purpose only and specifications are liable to change without warning.


⁽¹⁾ Information as to emissions of volatile compounds in the indoor air, which might be harmful to the health when inhaled, on a scale from Class A+ (very low emissions) to C (high emissions).

⁽²⁾ No change in appearance and swelling ≤ 0.2 mm. We guarantee water resistance in accordance with NALFA and ISO 4760 standards, subject to compliance with the Alsafloor installation protocol.

⁽³⁾ The thermal resistance of Alsafloor laminate flooring allows it to be installed on low temperature storage underfloor heating systems, and electric underfloor heating systems, subject to compliance with the Alsafloor installation protocol.

^(*) EC and UKCA marking declaration of conformity available on request on our website. All our products comply with the EN 14041 norm.

ACCESSORIES COORDINATED WITH FLOORING DESIGNS

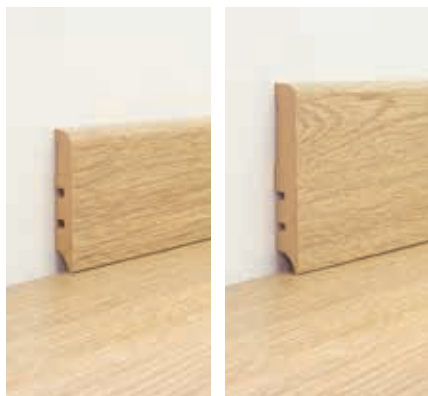

Skirting F58 or F80

Dim: 2200 x 58 x 12 mm - 7.22' x 2.28" x 0.47"
or 2200 x 80 x 15 mm - 7.22' x 3.15" x 0.59".
X 5 skirtings = 11 ml - 36.09'. To clip, tack, screw or glue.



Scoties

Dim: 2200 x 16 x 16 mm - 7.22' x 0.63" x 0.63".
X 10 skirtings = 22 ml - 72.18'. To tack, screw or glue.



Transition section profile or T-section

Length: 900 or 1800 mm - 2.95' or 5.91'.
X 10 units, film-wrapped, PVC base and hardware included.



White skirting F58 or F80

Dim: 2200 x 58 x 12 mm - 7.22' x 2.28" x 0.47"
or 2200 x 80 x 15 mm - 7.22' x 3.15" x 0.59".
Packing: 5 pieces/box = 11 ml - 36.09'.
To clip, tack, screw or glue.



Coated quarter round «Scoties»

Dim: 2200 x 16 x 16 mm - 7.22' x 0.63" x 0.63".
Packing: 10 pieces/box = 22 ml - 72.18'.
To clip, tack, screw or glue.



Adaptable covering skirting

Dim: 2200 x 130 x 16 mm - 7.22' x 5.12" x 0.63".
Packing: 6 pieces/box = 13.2 ml - 43.31'.
Installation: to clip, tack, screw or glue.



Grout liner

For application below our filler as part of the Water resistant ALSAFLOORING installation protocol.
Dim: 10 mm x 5 m - 0.39" x 16.40'.



Water resistant filler

For application on a joint base as part of the ALSAFLOORING Water resistant installation protocol. 300 ml - 10.14 fl oz PE cartridge (*300 gr - 0.661 lb), box of 12 units.




Universal skirting adhesive



310 ml - 10.48 fl oz cartridge. Box of 12 units.

UNDERLAYS




 2 mm - 0.079"

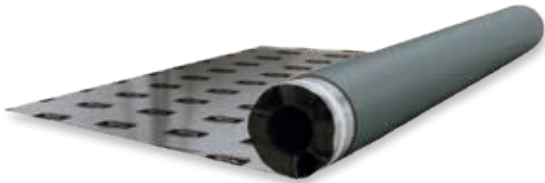 -18 dB




 2,15 mm - 0.085"

 -20 dB




 2,2 mm - 0.087"

 -19 dB



MULTIPROTECT ACOUSTIC

Technical and versatile

PU+PET underlay lined with an aluminium vapour barrier. 26 % airborne noise reduction. High load resistance.

ALSAFOAM


Economical (2 in 1)


1 roll - 25 m² - 269.10 ft²
Acoustic PE underlay ready-fitted with a vapour barrier (200 µ) and overlap strip.

AQUASTOP

Acoustic and thermic



1 box - 6 m² - 64.58 ft²
3-in-1 folding XPS+PET underlay, including integrated vapour barrier and overlap strip. 14% airborne noise reduction.

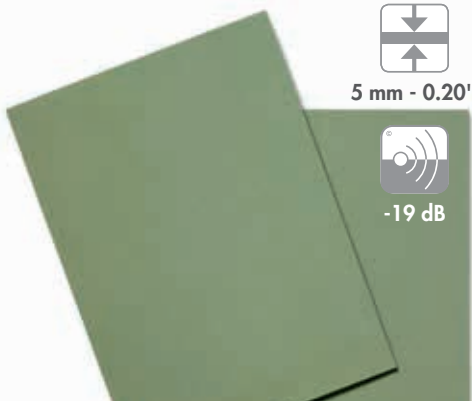

 5 mm - 0.20"

 -19 dB




 150µ

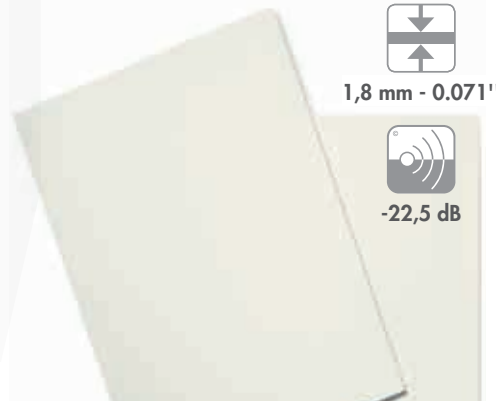


 1,8 mm - 0.071"

 -22,5 dB



FLOORISOL

Ecological and thermic

1 box - 7 m² - 75.35 ft²
Stable and durable wood fibre tile underlay. Compensates for gaps of up to 3 mm - 0.12".

ALSAPROTECT

1 box - 20 m² - 215.28 ft²
It prevents moisture rising. Suitable with Floorisol and Conforlay.

CONFORLAY

Technical and efficient

1 box - 7 m² - 75.35 ft²
Wood fibre underlay. High airborne noise reduction 42 %. Very high load resistance.

FLOORISOL
 + ALSAPROTECT
 OR
 CONFORLAY
 + ALSAPROTECT



For more information please see our Accessories catalogue.



ALSAFLOOR

Z.I. - 1 rue de l'Europe - 67521 Marlenheim Cedex - France
tel. +33 (0)3 88 59 29 89 - fax. +33 (0)3 88 59 28 49

www.alsaflooring.com

A BRAND  **ALSA FLOORING**