

ULTRA

ULTRA CLICK 55

SPC rigid vinyl flooring TILES



Finition gra matt – Gra matt coating

Couche d'usure – Wearlayer 0,55 mm

Film décor – Color film

Panneau SPC – SPC Panel

Sous-couche IXPE – Built-in underlay IXPE 1 mm

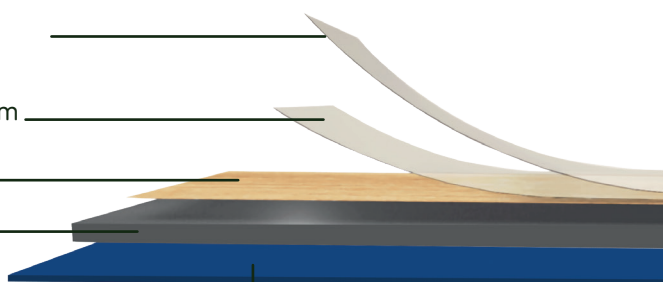

**Fast
and precise**



◀ Wearlayer / 0,55 mm

◀ 5 mm

◀ Underlay IXPE / 1 mm



**Ultra
Matt**







Classe DS

30 ans
Residential warranty

10 ans
Commercial warranty

TILES DIMENSIONS

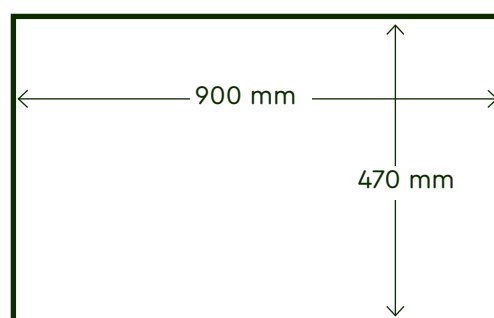

Kits/pallet : 32
m²/pallet : 67,68 m²
Weight/pallet : 710 kg



* A VOC rating expresses the amount of volatile material in the interior air which may present a health hazard when inhaled. It is measured on a scale from A+ (very low emissions) to C (high emissions)

ALSA FLOORING

ALSAFLOORING - ZI,1 rue de l'Europe
67521 Marlenheim France
Tél: +33 (0)3 88 59 29 89
Fax : +33 (0)3 88 59 28 49

ULTRA

ULTRA CLICK 55

SPC rigid vinyl flooring
TILES



22 Cotton
Ref alsaflooring :
601133
Gencode :
3512486011335



23 Mist
Ref alsaflooring :
601134
Gencode :
3512486011342