

ULTRA

ULTRA CLICK 55 [SYNCHROME]

SPC rigid vinyl flooring
PLANKS



Finition gra matt – Gra matt coating

Couche d'usure – Wearlayer 0,55 mm

Film décor – Color film

Panneau SPC – SPC Panel

Sous-couche IXPE – Built-in underlay IXPE 1 mm

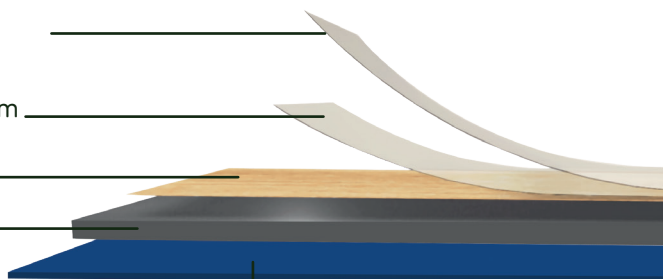


Fast
and precise



◀ Wearlayer / 0,55 mm

◀ 5 mm

◀ Underlay IXPE / 1 mm






Classe DS



Sychrone



PLANK DIMENSIONS



Kits/pallet : 50
m²/pallet : 87.84 m²
Weight/pallet : 945 kg



* A VOC rating expresses the amount of volatile material in the interior air which may present a health hazard when inhaled. It is measured on a scale from A+ (very low emissions) to C (high emissions)

ALSA FLOORING

ALSAFLOORING - ZI,1 rue de l'Europe
67521 Marlenheim France
Tél: +33 (0)3 88 59 29 89
Fax : +33 (0)3 88 59 28 49


ULTRA

ULTRA CLICK 55

SPC rigid vinyl flooring PLANKS



08 Tanned oak
Ref alsaflooring :
601124
Gencode :
3512486011243



09 Bark
Ref Alsaflooring :
601125
Gencode :
3512486011250



10 Old Grey Oak
Ref Alsaflooring :
601126
Gencode:
3512486011267



11 Salt
Ref Alsaflooring :
601127
Gencode :
3512486011274



12 Night Oak
Ref Alsaflooring :
601128
Gencode :
3512486011281



13 Bronze Oak
Ref alsaflooring :
601129
Gencode :
3512486011298



14 Silver Wood
Ref alsaflooring :
601130
Gencode :
3512486011304



15 Nature Oak
Ref Alsaflooring :
601131
Gencode :
3512486011311



16 Wild
Ref Alsaflooring :
601132
Gencode :
3512486011328